


► NFJCF - F300 Centrifugal Jet Fan

Centrifugal Jet Fans can be used when there is height issue in the parking lots.




MOTOR INSULATION CLASS	H CLASS
MOTOR PROTECTION CLASS	IP 54-IP 55
MOTOR EFFICIENCY CLASS	IE1-IE2
MOTOR ENCLOSURE TYPE	TEAO
BODY MATERIAL	GALVANIZED SHEET METAL
BODY COATING	Powder Coating
IMPELLER MATERIAL	GALVANIZED SHEET METAL
DUTY CYCLE	IEC Duty Cycle-S1
WORKING TEMPERATURE	-20 - +50 °C
STANDARDS	CE

MODEL	FLOW RATE (m ³ /h)	AIR SPEED (m/s)	THRUST FORCE (N)	REVOLUTION (rpm)	MOTOR POWER (kW)	NOISE LEVEL (dB(A)-1m)
NFJCF 50	2.850 - 5.760	10,0 - 20,0	13 - 50	750 - 1.500	0,30 - 1,20	38 - 54
NFJCF 70	3.500 - 7.009	12,2 - 24,4	19 - 70	750 - 1.500	0,55 - 2,20	43 - 58
NFJCF 90	3.800 - 7.641	13,3 - 26,6	25 - 90	750 - 1.500	0,55 - 2,20	46 - 62

-SYSTEM AUTOMATION
-CFD ANALYSIS

DRAWING

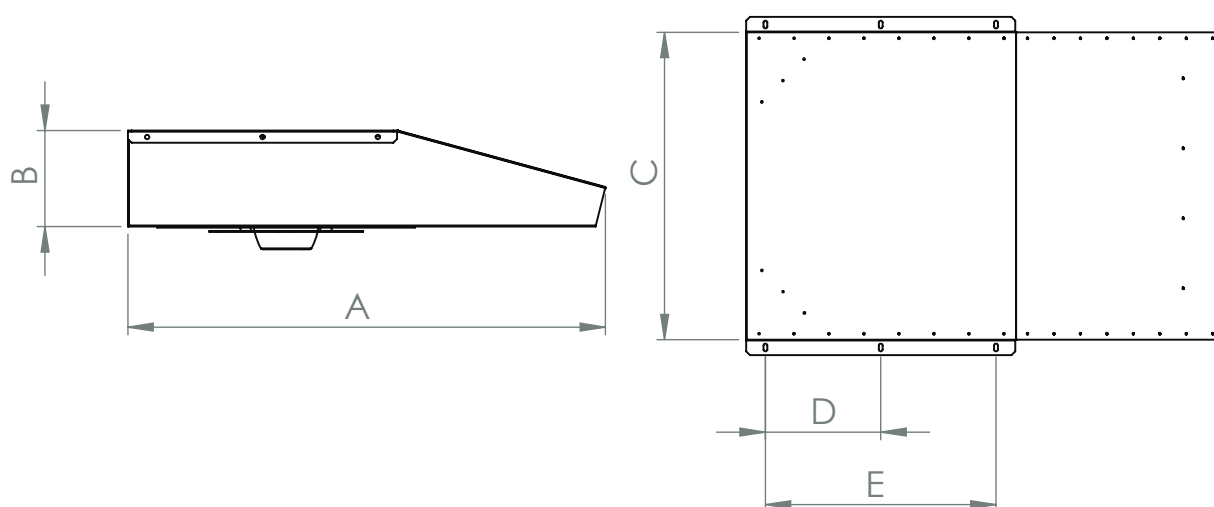

MODEL	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
NFJCF 50	1215	250	800	300	600
NFJCF 70	1300	300	840	300	600
NFJCF 90	1300	300	840	300	600